

COST:

SIGN = \$35.00 (POSTS NOT INCLUDED)

CODE FOR PAYMENT:

101-502-4220

MOUNTING:

7' STEEL ANGLE POSTS DRIVEN 3' INTO GROUND WITH AIR COMPRESSOR. INSTALL SIGNS WITH STAINLESS STEEL FASTENERS.


LOCATION:

FOLLOW APPROVED CITY OF MAPLEWOOD WETLAND BUFFER SIGN PLAN.

SIGN DETAIL:

FONT: ARIAL BOLD  
FONT COLOR: WHITE  
LEAF OUTLINE & BORDER: WHITE  
LEAF INTERIOR: RED  
SIGN BACKGROUND: BROWN  
OUTER BORDER: WHITE

CORNER RADIUS: 1 1/4"  
INNER LEAF: 2" (TALL) X 3" (WIDE)  
INNER BORDER: H=11 1/2" W=7 1/2"  
HOLES: 1/2" DIAMETER  
BORDER: 1/4"

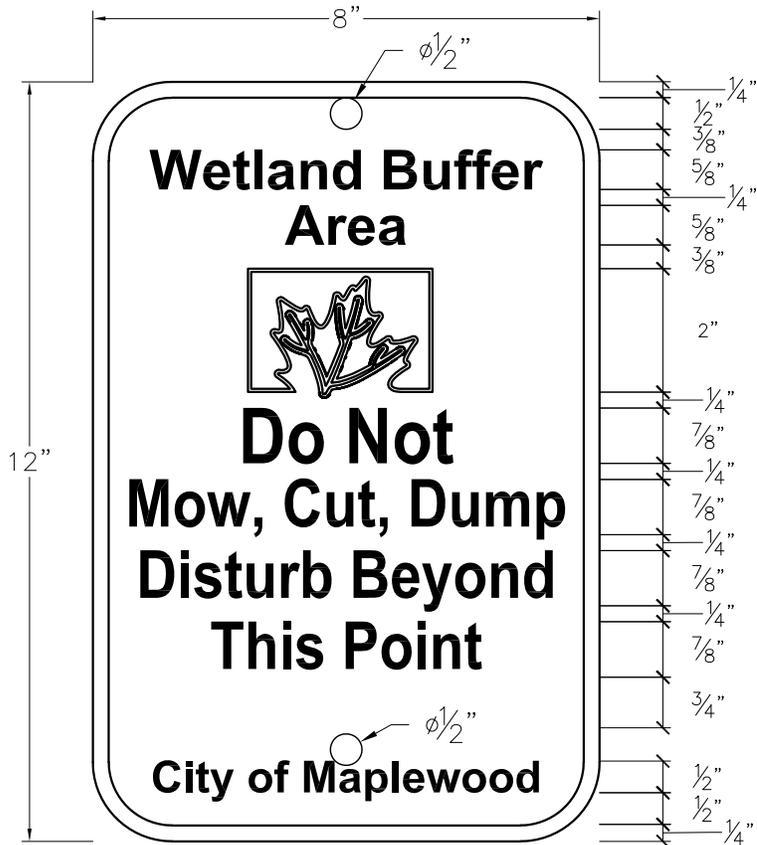

DESIGN: TMS	DATE: 3-95		
DRAWN: RKL	FILENAME: P:\WORKS\CAD\PLATES2021\P604		
REVISIONS	3-06	5-17	7-21



CITY OF MAPLEWOOD-ENGINEERING DEPT.

WETLAND BUFFER SIGN

PLATE NO.

604